



DIMENSIONS & WEIGHTS

Wheel base, mm	2800
Overall width, mm	1815
Overall length, mm	4695
Overall height, mm	1840
Min. ground clearance, mm	215
Maximum GVW, kg	2710
Kerb weight, kg	2065

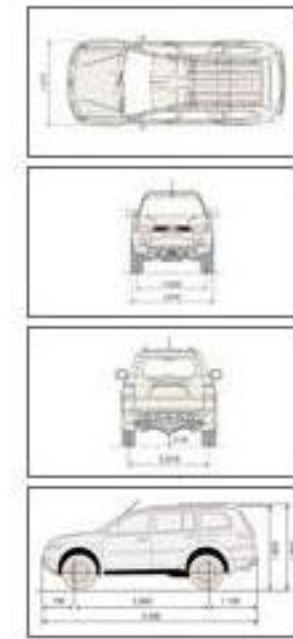

Click on a thumbnail to enlarge & view details

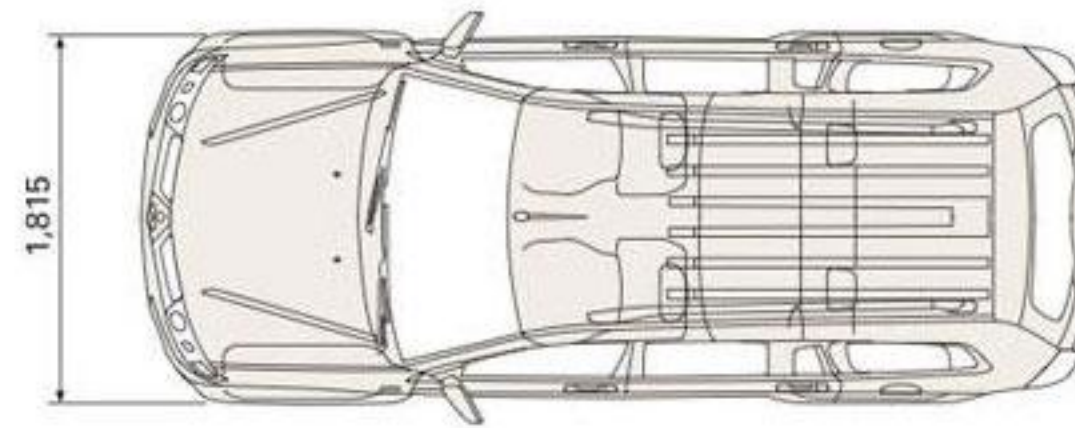

ENGINE

Type	2.5L 16 Valve intercooled turbocharged DOHC common rail DI-D
Displacement - cc	2477
Max. Engine output, kW (PS) @ rpm	131 (178) @ 4000
Max. Torque, Nm @ rpm	400 Nm at 2000 – 2500 rpm

PERFORMANCE

Departure angle, deg	25
Ramp Break over angle, deg	23
Approach angle, deg	36
Lateral turning angle, deg	45
Maximum gradeability, deg	35 deg. (tanθ=0.7)
Min. turning circle radius, m	5.6



DRIVE SYSTEM


Type Super Select 4WD



TRANSMISSION

Type/ Model Floor Shift, Manual operated, Synchronesh

No. of gears 5 Forward ; 1 Reverse

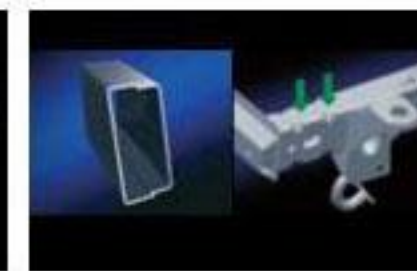

SUSPENSION

Front Double wishbone with coil spring suspension

Rear 3 link, coil spring suspension

Front & Rear Stabilizer bars



STEERING

Rack & Pinion power assisted steering

Low Tilt steering column



BRAKES

Front 16" ventilated discs

Rear 16" ventilated drum-in-discs

Type Hydraulic operated on all 4 wheels; 2 circuits front and rear split



WHEEL & TYRE

Wheel Rim size 17x7.5 JJ Alloy

Tyre size 265/65R17



FUEL TANK

Capacity, L 70